

# MOOG

## Videolarm

© 2009, Videolarm, Inc. All Rights Reserved



© 2009, Videolarm, Inc. All Rights Reserved

## FDW8CF2

Fusion Dome (Outdoor/Indoor Housing with Wall Mount)

[www.videolarm.com](http://www.videolarm.com)

Installation and Operation Instructions for the following models:

- |         |   |
|---------|---|
| FDW8CF2 | 8" Outdoor dome hsg w/wall mount, clear dome, w/24Vac input, heater/ blower, (1) fixed camera bracket, MCL8.5"    |
| FDP8CF2 | 8" Outdoor dome hsg w/pendant mount, clear dome, w/24Vac input, heater/ blower, (1) fixed camera bracket, MCL8.5" |
| FDP8CF2 | 8" Indoor dome hsg w/wall mount, tinted dome, plus (1) fixed camera bracket, MCL8.5"                              |
| IFDP8CF | 8" Indoor dome hsg w/pendant mount, tinted dome, plus (1) fixed camera bracket, MCL8.5"                           |



Before attempting to connect or operate this product, please read these instructions completely.

81-IN5417  
01-29-2009

## IMPORTANT SAFEGUARDS

- 1 Read these instructions.
- 2 Keep these instructions.
- 3 Heed all warnings.
- 4 Follow all instructions.
- 5 Do not use this apparatus near water.
- 6 Clean only with damp cloth.
- 7 Do not block any of the ventilation openings. Install in accordance with the manufacturers instructions.
- 8 Cable Runs- All cable runs must be within permissible distance.
- 9 Mounting - This unit must be properly and securely mounted to a supporting structure capable of sustaining the weight of the unit.

### Accordingly:

- a. The installation should be made by a qualified installer.
  - b. The installation should be in compliance with local codes.
  - c. Care should be exercised to select suitable hardware to install the unit, taking into account both the composition of the mounting surface and the weight of the unit.
- 10 Do not install near any heat sources such as radiators, heat registers, stoves, or other apparatus ( including amplifiers) that produce heat.
  - 11 Do not defeat the safety purpose of the polarized or grounding-type plug. A polarized plug has two blades with one wider than the other. A grounding type plug has two blades and a third grounding prong. The wide blade or the third prong are provided for your safety. When the provided plug does not fit into your outlet, consult an electrician for replacement of the obsolete outlet.
  - 12 Protect the power cord from being walked on or pinched particularly at plugs, convenience receptacles, and the point where they exit from the apparatus.
  - 13 Only use attachment/ accessories specified by the manufacturer.
  - 14 Use only with a cart, stand, tripod, bracket, or table specified by the manufacturer, or sold with the apparatus. When a cart is used, use caution when moving the cart/ apparatus combination to avoid injury from tip-over.
  - 15 Unplug this apparatus during lighting storms or when unused for long periods of time.
  - 16 Refer all servicing to qualified service personnel. Servicing is required when the apparatus has been damaged in any way, such as power-supply cord or plug is damaged, liquid has been spilled or objects have fallen into the apparatus, the apparatus has been exposed to rain or moisture, does not operate normally, or has been dropped.

Be sure to periodically examine the unit and the supporting structure to make sure that the integrity of the installation is intact. Failure to comply with the foregoing could result in the unit separating from the support structure and falling, with resultant damages or injury to anyone or anything struck by the falling unit.

## UNPACKING

Unpack carefully. Electronic components can be damaged if improperly handled or dropped. If an item appears to have been damaged in shipment, replace it properly in its carton and notify the shipper.

Be sure to save:

- 1 The shipping carton and packaging material. They are the safest material in which to make future shipments of the equipment.
- 2 These Installation and Operating Instructions.

## SERVICE

If technical support or service is needed, contact us at the following number:

TECHNICAL SUPPORT  
AVAILABLE 24 HOURS  
1 - 800 - 554 - 1124

## SAFETY PRECAUTIONS



The lightning flash with an arrowhead symbol, within an equilateral triangle, is intended to alert the user to the presence of non-insulated "dangerous voltage" within the product's enclosure that may be of sufficient magnitude to constitute a risk to persons.

Este símbolo se piensa para alertar al usuario a la presencia del "voltaje peligroso no-aislado" dentro del recinto de los productos que puede ser un riesgo de choque eléctrico.

Ce symbole est prévu pour alerter l'utilisateur à la présence "de la tension dangereuse" non-isolée dans la clôture de produits qui peut être un risque de choc électrique.

Dieses Symbol soll den Benutzer zum Vorhandensein der nicht-Isolier "Gefährdungsspannung" innerhalb der Produkteinschließung alarmieren die eine Gefahr des elektrischen Schlages sein kann.

Este símbolo é pretendido alertar o usuário à presença "di tensão perigosa non-isolada" dentro do cerco dos produtos que pode ser um risco de choque elétrico.

Questo simbolo è inteso per avvertire l'utente alla presenza "di tensione pericolosa" non-isolata all'interno della recinzione dei prodotti che può essere un rischio di scossa elettrica.



The exclamation point within an equilateral triangle is intended to alert the user to presence of important operating and maintenance (servicing) instructions in the literature accompanying the appliance.

Este símbolo del punto del exclamation se piensa para alertar al usuario a la presencia de instrucciones importantes en la literatura que acompaña la aplicación.

Ce symbole de point d'exclamation est prévu pour alerter l'utilisateur à la présence des instructions importantes dans la littérature accompagnant l'appareil.

Dieses Ausruf Punktsymbol soll den Benutzer zum Vorhandensein de wichtigen Anweisungen in der Literatur alarmieren, die das Gerät begleitet.

Este símbolo do ponto do exclamation é pretendido alertar o usuário à presença de instruções importantes na literatura que acompanha o dispositivo.

Questo simbolo del punto del exclamation è inteso per avvertire l'utente alla presenza delle istruzioni importanti nella letteratura che accompagna l'apparecchio.



## LIMITED WARRANTY FOR VIDEOLARM INC. PRODUCTS

**VIDEOLARM INC. warrants this Product to be free from defects in material or workmanship, as follows:**

PRODUCT CATEGORY	PARTS	LABOR
All Enclosures and Electronics	Five (5) Years	Five (5) Years
Pan/Tilts	Three (3) Years	Three (3) Years
Poles/Pole Evators	Three (3) Years	Three (3) Years
Warrior/Q-View/I.R. Illuminators	Five (5) Years	Five (5) Years
SView Series	Five (5) Years	Five (5) Years
Controllers	Five (5) Years	Five (5) Years
Power Supplies	Five (5) Years	Five (5) Years
Accessory Brackets	Five (5) Years	Five (5) Years

During the labor warranty period, to repair the Product, Purchaser will either return the defective product, freight prepaid, or deliver it to Videolarm Inc. Decatur GA. The Product to be repaired is to be returned in either its original carton or a similar package affording an equal degree of protection with a RMA # (Return Materials Authorization number) displayed on the outer box or packing slip. To obtain a RMA# you must contact our Technical Support Team at 800.554.1124, extension 101. Videolarm will return the repaired Product freight prepaid to Purchaser. Videolarm is not obligated to provide Purchaser with a substitute unit during the warranty period or at any time. After the applicable warranty period, Purchaser must pay all labor and/or parts charges.

**The limited warranty stated in these product instructions is subject to all of the following terms and conditions:**

### TERMS AND CONDITIONS

**1. NOTIFICATION OF CLAIMS: WARRANTY SERVICE:** If Purchaser believes that the Product is defective in material or workmanship, then written notice with an explanation of the claim shall be given promptly by Purchaser to Videolarm but all claims for warranty service must be made within the warranty period. If after investigation Videolarm determines that the reported problem was not covered by the warranty, Purchaser shall pay Videolarm for the cost of investigating the problem at its then prevailing per incident billable rate. No repair or replacement of any Product or part thereof shall extend the warranty period as to the entire Product. The specific warranty on the repaired part only shall be in effect for a period of ninety (90) days following the repair or replacement of that part or the remaining period of the Product parts warranty, whichever is greater.

**2. EXCLUSIVE REMEDY: ACCEPTANCE:** Purchaser's exclusive remedy and Videolarm's sole obligation is to supply (or pay for) all labor necessary to repair any Product found to be defective within the warranty period and to supply, at no extra charge, new or rebuilt replacements for defective parts.

**3. EXCEPTIONS TO LIMITED WARRANTY:** Videolarm shall have no liability or obligation to Purchaser with respect to any Product requiring service during the warranty period which is subjected to any of the following: abuse, improper use; negligence, accident, lightning damage or other acts of God (i.e., hurricanes, earthquakes), modification, failure of the end-user to follow the directions outlined in the product instructions, failure of the end-user to follow the maintenance procedures recommended by the International Security Industry Organization, written in product instructions, or recommended in the service manual for the Product. Furthermore, Videolarm shall have no liability where a schedule is specified for regular replacement or maintenance or cleaning of certain parts (based on usage) and the end-user has failed to follow such schedule; attempted repair by non-qualified personnel; operation of the Product outside of the published environmental and electrical parameters, or if such Product's original identification (trademark, serial number) markings have been defaced, altered, or removed. Videolarm excludes from warranty coverage Products sold AS IS and/or WITH ALL FAULTS and excludes used Products which have not been sold by Videolarm to the Purchaser. All software and accompanying documentation furnished with, or as part of the Product is furnished "AS IS" (i.e., without any warranty of any kind), except where expressly provided otherwise in any documentation or license agreement furnished with the Product.

**4. PROOF OF PURCHASE:** The Purchaser's dated bill of sale must be retained as evidence of the date of purchase and to establish warranty eligibility.

### DISCLAIMER OF WARRANTY

EXCEPT FOR THE FOREGOING WARRANTIES, VIDEOLARM HEREBY DISCLAIMS AND EXCLUDES ALL OTHER WARRANTIES, EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO ANY AND/OR ALL IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND/OR ANY WARRANTY WITH REGARD TO ANY CLAIM OF INFRINGEMENT THAT MAY BE PROVIDED IN SECTION 2-312(3) OF THE UNIFORM COMMERCIAL CODE AND/OR IN ANY OTHER COMPARABLE STATE STATUTE. VIDEOLARM HEREBY DISCLAIMS ANY REPRESENTATIONS OR WARRANTY THAT THE PRODUCT IS COMPATIBLE WITH ANY COMBINATION OF NON-VIDEOLARM PRODUCTS OR NON-VIDEOLARM RECOMMENDED PRODUCTS PURCHASER CHOOSES TO CONNECT TO PRODUCT.

### LIMITATION OF LIABILITY

THE LIABILITY OF VIDEOLARM, IF ANY, AND PURCHASER'S SOLE AND EXCLUSIVE REMEDY FOR DAMAGES FOR ANY CLAIM OF ANY KIND WHATSOEVER, REGARDLESS OF THE LEGAL THEORY AND WHETHER ARISING IN TORT OR CONTRACT, SHALL NOT BE GREATER THAN THE ACTUAL PURCHASE PRICE OF THE PRODUCT WITH RESPECT TO WHICH SUCH CLAIM IS MADE. IN NO EVENT SHALL VIDEOLARM BE LIABLE TO PURCHASER FOR ANY SPECIAL, INDIRECT, INCIDENTAL, OR CONSEQUENTIAL DAMAGES OF ANY KIND INCLUDING, BUT NOT LIMITED TO, COMPENSATION, REIMBURSEMENT OR DAMAGES ON ACCOUNT OF THE LOSS OF PRESENT OR PROSPECTIVE PROFITS OR FOR ANY OTHER REASON WHATSOEVER.



## Electrical Specifications

Power 24VAC  
Class 2 Only

**FDW8CF2**



English

24 VAC  
26 Watts

Accessories:  
Camera Power:  
Tools Required:

Heater: 25 Watts, Blower: 1 Watt  
32 Watts Max  
.100" Flat Head Screwdriver  
Phillips Head Screwdriver



Español

24 VAC  
26 vatios

Accesorios:  
Energía De la Cámara fotográfica:  
Las Herramientas Requerieron:  
Calentador: 25 Vatios, Soplador: 1 vatio  
32 vatios Max  
Destornillador Principal Plano Del  
100". Destornillador Principal Phillips.



Français

24 VCA  
26 watts

Accessoires :  
Puissance D'Appareil-photo :  
Les Outils Ont exigé :  
Réchauffeur : 25 Watts, Ventilateur : 1 watt  
32 watts Max  
Tournevis Principal Plat De 100".  
Tournevis Principal Phillips.



Deutsch

24 VAC  
26 Watt

Zusatzgeräte:  
Kamera-Energie:  
Werkzeuge Erforderten:  
Heizung: 25 Watt, Gebläse: 1 Watt.  
32 Watt Max  
100"Flacher Hauptschraubenzieher.  
Kreuzkopfhauptschraubenzieher.



Portuguese

24 VAC  
26 watts

Acessórios:  
Poder Da Câmera:  
Ferramentas Requeridas:  
Calefator: 25 Watts, Ventilador: 1 watt.  
32 watts Max  
Chave de fenda Principal Lisa Do  
100". Chave de fenda Principal Phillips.



Italiano

24 VCA.  
26 watt

Accessori: Riscaldatore:  
Alimentazione Della Macchina fotografica:  
Gli Attrezzi Hanno richiesto:  
25 Watt, Ventilatore: 1 watt.  
32 watt Max  
Cacciavite Capo Piano Del 100".  
Cacciavite Capo "phillips".

### IFDP8CF IFDW8CF (INDOOR ONLY)




Indoor Models IFDP8CF/ IFDW8CF Include **NO** Power Accessories

International Models IFDW8C2FE/ IFDP8C2FE Include **NO** Power Transformer

- 24 VAC  
No power options provided.  
Power required for camera only.
- 24 VAC  
Ningunas opciones de la energía proporcionaron.  
Energía requerida para la cámara fotográfica solamente.
- 24 VCA  
Option de puissance n'a pas fourni.  
Puissance requise pour l'appareil-photo seulement.
- 24 VAC  
Keine Energie Wahlen stellten zur Verfügung.  
Energie erfordert für nur Kamera.
- 24 VAC  
Nenhumas opções do poder fornecidas.  
Poder requerido para a câmera somente.
- 24 VAC  
Nessun'opzione di alimentazione ha fornito.  
Alimentazione richiesta per la macchina fotografica soltanto.

## Contents of Box

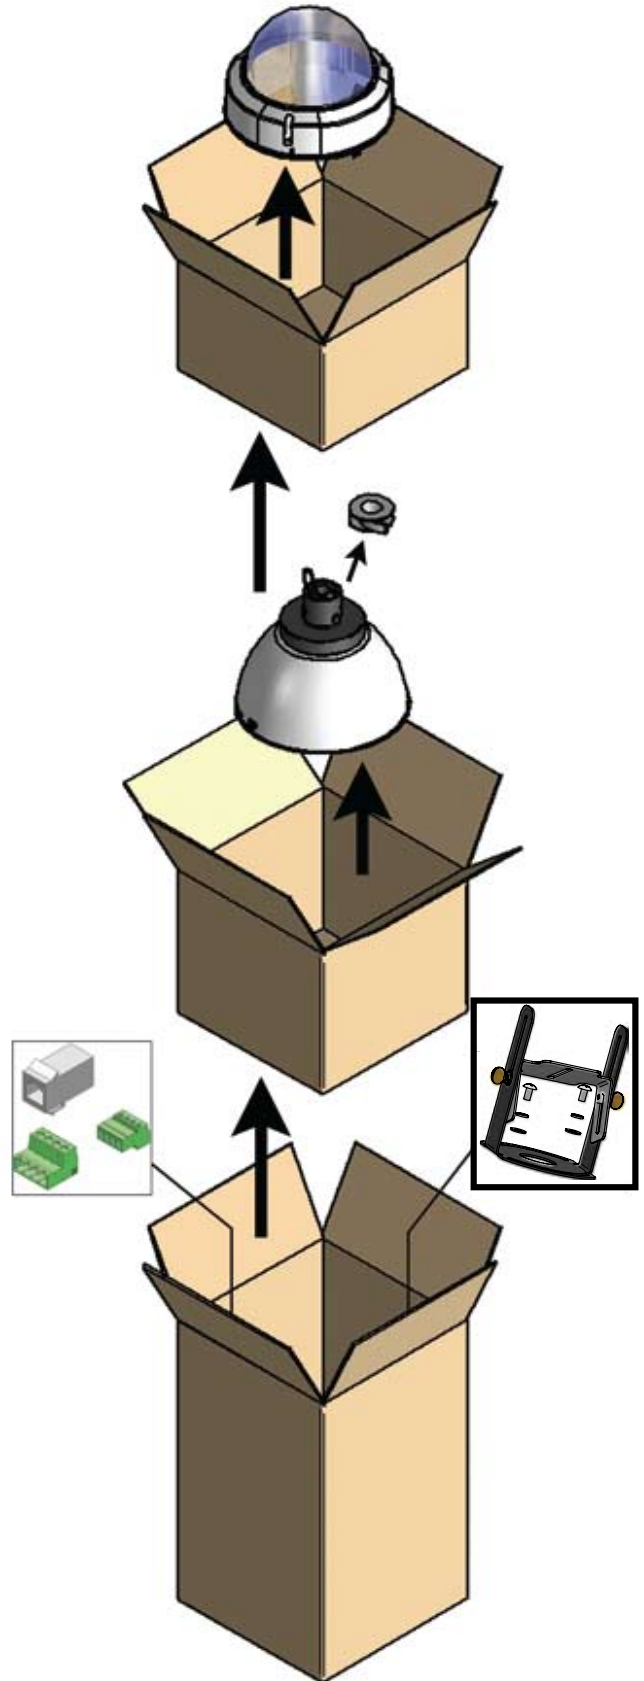

\*\*\* WALL MOUNT FOR (W) MODELS.

1

## WALL MOUNTING



**Securely mount unit to wall or to appropriate adapter bracket.**

- Monte con seguridad la unidad a la pared o al soporte apropiado del adaptador.
- Montez solidement l'unité au mur ou à la parenthèse appropriée d'adaptateur.
- Bringen Sie sicher Maßeinheit zur Wand oder zum passenden Adapterhaltewinkel an.
- Monte firmemente a unidade à parede ou ao suporte apropriado do adaptador.
- Monti saldamente l'unità alla parete o alla staffa adatta dell'adattatore.

2



**If using conduit connect, connect to incoming conduit fitting.**

- Si usa el conducto conecte, conecte con la guar-nición entrante del conducto.
- Si à l'aide du conduit reliez, reliez à l'ajustage de précision entrant de conduit.
- Wenn Sie Rohr verwenden, schließen Sie an, schließen Sie an ankommende Rohrbefestigung an.
- Se usando a canalização conecte, conecte ao encaixe entrante da canalização.
- Se per mezzo del condotto colleghi, colleghi al mon-taggio ricevuto del condotto.


3



**Open access door to access power and control connectors.**

- Abra la puerta de acceso en los conectadores de la energía y de control del acceso.
- Ouvrez la porte d'accès aux connecteurs de puissance et de commande d'accès.
- Öffnen Sie Zugang zur Zugang Energie und zu den Geräteanschlüssen.
- Abra a porta de acesso aos conectores do poder e de controle do acesso.
- Apra il portello di accesso ai connettori di alimentazi-one e di controllo di accesso.

4

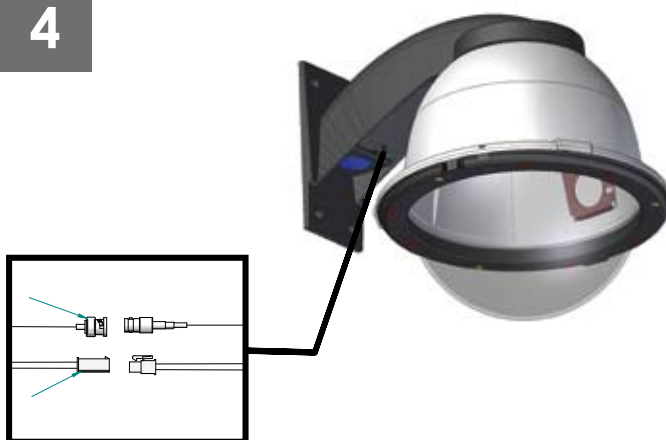


**Make wire connection as they are required for your needs.**

- Haga la conexión del alambre como se requieren para sus necesidades.
- Établissez le rapport de fil comme ils sont exigés pour vos besoins.
- Stellen Sie Leitung Beziehung her, wie sie für Ihre Notwendigkeiten angefordert werden.
- Faça a conexão do fio como são requeridos para suas necessidades.
- Faccia il collegamento del legare come sono richiesti per i vostri bisogni.




5

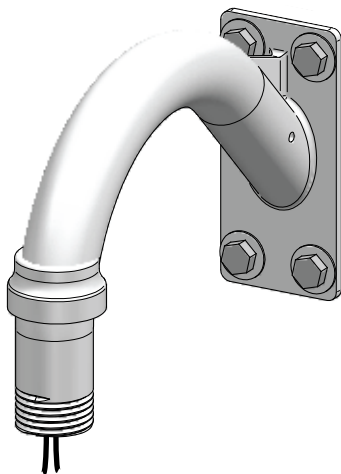FOR PENDENT/  
WALL MOUNTING

**Securely mount bracket to wall. Pull wiring through bracket and position grommet as shown.**

- Con seguridad soporte del montaje a emparedar. Tire del cableado a través del soporte y del ojal de la posición según lo demostrado.
- Solidement parenthèse de bâti à murer. Tirez le câblage par la parenthèse et le canon isolant de position comme montré.
- Sicher Einfassung Haltewinkel wall. Ziehen Sie Verdrahtung durch Haltewinkel und Position Gummimuffe, wie gezeigt.
- Firmemente suporte da montagem a wall. Puxe a fiação através do suporte e do ilhó da posição como mostrado.
- Saldamente staffa del supporto da wall. Tiri i collegamenti tramite la staffa ed il gommino di protezione di posizione come indicato.


6

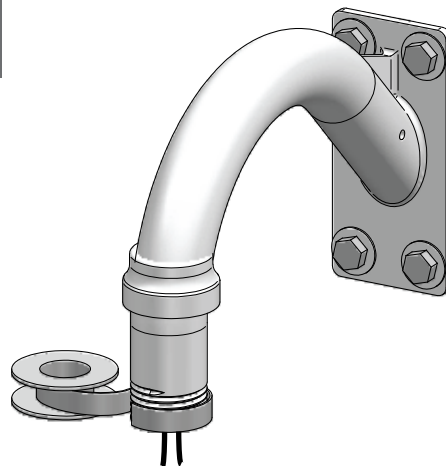

**Wrap Teflon™ tape around the pipe threads to ensure a tight seal.**

- La cinta del Teflon del abrigo alrededor de la pipa rosca para asegurar un sello apretado.
- La bande de teflon d'enveloppe autour de la pipe fileté pour assurer un joint serré.
- Verpackung Teflonklebeband um das Rohr verlegt, um eine feste Dichtung sicherzustellen.
- A fita adesiva do Teflon do envoltório em torno da tubulação enfia para assegurar um selo apertado.
- Il nastro del Teflon dell'involucro intorno al tubo filetta per accertare una guarnizione stretta.


7

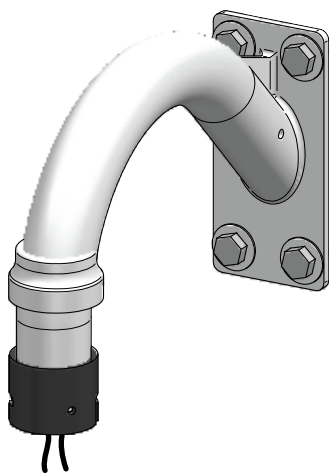

**Screw the coupling onto the pipe threads until it is hand tight.**

- Atornille el acoplador sobre los hilos de rosca de la pipa hasta que es mano firmemente.
- Vissez le couplage sur les fils de pipe jusqu'à ce que ce soit main fortement.
- Schrauben Sie die Koppelung auf die Rohrgewinde, bis es Hand fest ist.
- Parafuse o acoplamento nas linhas da tubulação até que esteja mão firmemente.
- Avviti l'accoppiamento sui filetti del tubo fino a che non sia fortemente mano.


8

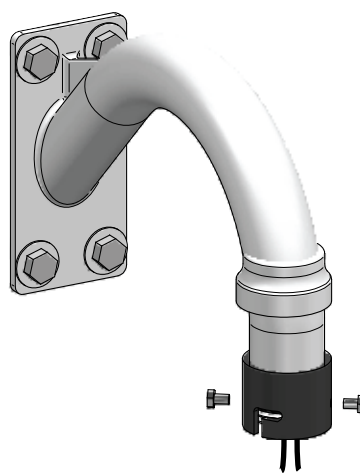

**Screw the (2) bolts into the coupling.**

- Atornille (2) los pernos en el acoplador.
- Vissez (2) les boulons dans l'accouplement.
- Schrauben Sie die (2) Schraubbolzen in die Koppelung.
- Parafuse (2) os parafusos no acoplamento.
- Avviti (2) i bulloni nell'accoppiamento.


9

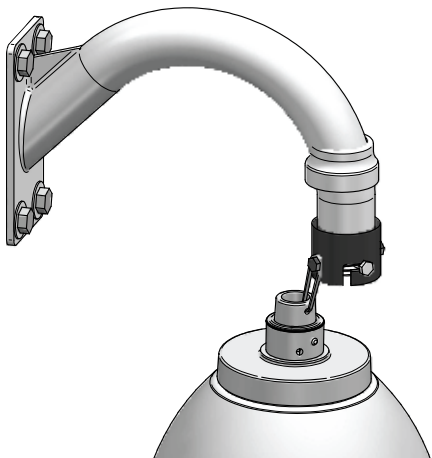

**Loop the lanyard over the set screw to temporarily hold housing.**

- Coloque el acollador sobre el tornillo de presión para celebrar temporalmente la cubierta.
- Faites une boucle la lanière au-dessus de la vis de réglage pour tenir temporairement le logement.
- Schlingen Sie die Abzuglinie über der Klemmschraube, um Gehäuse vorübergehend zu halten.
- Dê laços no colhedor sobre o parafuso de fixação para prender temporariamente a carcaça.
- Colleghi la cordinella in circuito sopra la vite di arresto temporaneamente per tenere l'alloggiamento.


10

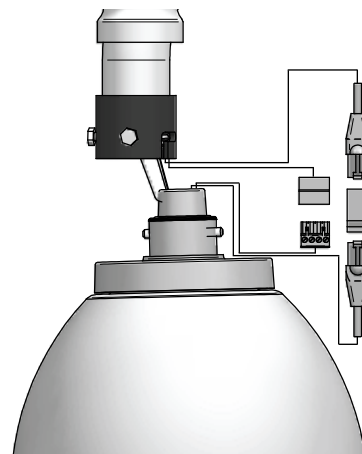

**Make the appropriate wiring connections from the dome to the gooseneck.**

- Haga las conexiones apropiadas del cableado de la bóveda al gooseneck.
- Établissez les rapports appropriés de câblage à partir du dôme au col de cygne.
- Stellen Sie die passenden Verdrahtung Beziehungen von der Haube zum gooseneck her.
- Faça as conexões apropriadas da fiação da abóbada ao gooseneck.
- Faccia i collegamenti adatti dei collegamenti dalla cupola al gooseneck.


11

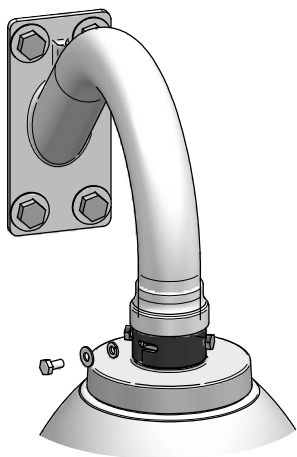

**Undo the lanyard, pull housing up and twist secure with the locking bolt and washers.**

- Deshaga el acollador, tire de contener para arriba y tuerza seguro con el perno y las arandelas de fijación.
- Défaitez la lanière, tirez loger vers le haut et tordez bloqué avec le boulon et les rondelles de fermeture.
- Annulieren Sie die Abzuglinie, ziehen Sie oben unterbringen und verdrehen Sie sicheres mit dem verriegelnschraubbolzen und den Unterlegscheiben.
- Undo o colhedor, puxe abrigo acima e torça seguro com o parafuso e as arruelas travando.
- Undo la cordinella, tiri l'alloggio in su e torca sicuro con il bullone e le rondelle di bloccaggio.


12

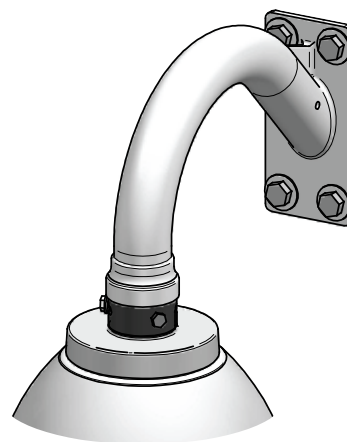

**Slide the grommet down over the coupling to prevent water from entering and complete the assembly.**

- Resbale el ojal abajo sobre el acoplador para evitar que el agua entre y para terminar a la asamblea.
- Glissez le canon isolant vers le bas au-dessus de l'accouplement pour empêcher l'eau d'entrer et pour accomplir l'assemblée.
- Schieben Sie die Gummimuffe unten über der Koppelung, um zu verhindern, daß Wasser und die Versammlung durchzuführen hereinkommt.
- Deslize o ilhó para baixo sobre o acoplamento para impedir que a água entre e para terminar o conjunto.
- Faccia scorrere il gommino di protezione giù sopra l'accoppiamento per impedire l'acqua entrare e per completare il complessivo.


13

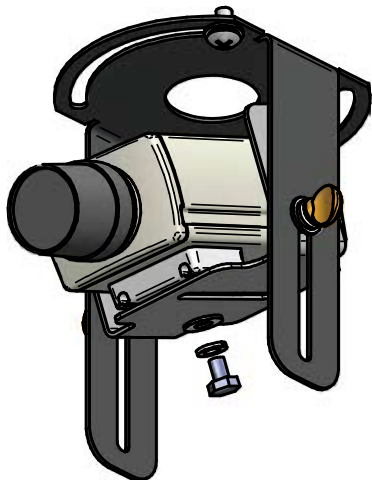

**Bolt camera to camera bracket as shown.**

- Cámara fotográfica del perno al soporte de la cámara fotográfica según lo demostrado.
- Appareil-photo de boulon à la parenthèse d'appareil-photo comme montré.
- Schraubbolzenkamera zum Kamerahaltewinkel, wie gezeigt.
- Câmera do parafuso ao suporte da câmera como mostrado.
- Macchina fotografica del bullone alla staffa della macchina fotografica come indicato.


14

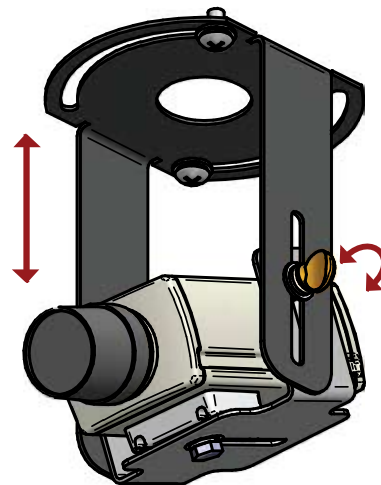

**Loosen the thumb screws to adjust the cameras height and tilt angle.**

- Afloje los tornillos de pulgar para ajustar la altura de las cámaras fotográficas y para inclinar ángulo.
- Desserrez les vis de pouce pour ajuster la taille d'appareils-photo et pour incliner l'angle.
- Lösen Sie die Rändelschrauben, um die Kamerahöhe zu justieren und Winkel zu kippen.
- Afrouxe os parafusos de polegar para ajustar a altura das câmeras e para inclinar o ângulo.
- Allenti le viti di pollice per registrare l'altezza delle macchine fotografiche e per inclinare l'angolo.

15

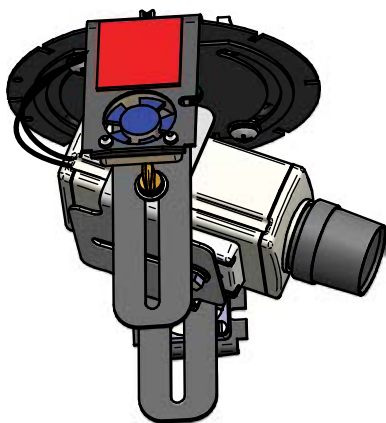

**For 24VAC models connect red and orange (24 VAC wires) to camera power inputs.**

- Para 24VAC los modelos conectan rojo y la naranja (24 alambres del VAC) con las entradas de energía de la cámara fotográfica.
- Pour 24VAC les modèles relient rouge et l'orange (24 fils de VCA) aux puissances fournies d'appareil-photo.
- Für 24VAC schließen Modelle Rotes und Orange (24 VAC Leitungen) an Kameraenergie Eingänge an.
- Para 24VAC os modelos conectam vermelhos e a laranja (24 fios do VAC) às entradas de poder da câmera.
- Per 24VAC i modelli collegano rosso e l'arancio (24 legare di VCA) agli input di alimentazione della macchina fotografica.

16

Total vA consumed	Wire Gauge							
	.5	.75	1.0	1.5	2.5	4	6	MM <sup>2</sup> AWG
	22	20	18	16	14	12	10	
5.5	ft m	400 121	600 182	960 292	-	-	-	
10	120 36.5	180 54.9	300 91.4	480 146	800 243	1300 396	-	
20	89 27.1	141 43.0	225 68.6	358 109	571 174	905 275	1440 438	
30	65 19.8	90 27.4	130 39.6	225 68.6	350 106	525 160	830 252	
40	44 13.4	70 21.3	112 34.1	179 54.6	285 86.9	452 138	720 219	
50	35 10.6	56 17.1	90 27.4	143 43.6	228 69.5	362 110	576 175	
60	29 9.4	47 14.3	75 22.9	119 36.2	190 57.9	301 91.7	480 146	
70	25 8.8	40 12.2	64 19.5	102 31.1	163 49.7	258 78.6	411 125	
80	31 7.6	34 10.3	55 16.8	85 25.9	140 42.7	215 65.5	340 103	

**These are recommended maximum distances for 24VAC with a 10% voltage drop.**

- Éstos se recomiendan las distancias máximas para 24VAC con una gota del voltage del 10%.
- Ceux-ci sont recommandés des distances maximum pour 24VAC avec une baisse de volatage de 10%.
- Diese werden maximale Abstände für 24VAC mit einem das 10% volatage Tropfen empfohlen.
- Estes são recomendados distâncias máximas para 24VAC com uma gota do volatage de 10%.
- Questi sono suggeriti distanze massime per 24VAC con una goccia di volatage di 10%.



17



**Fasten down the dome with a Phillips screwdriver.**

- Sujete abajo de la bóveda con un destornillador Phillips.
- Attachez en bas du dôme avec un tournevis Phillips.
- Befestigen Sie sich hinunter die Haube mit einem Kreuzkopfschraubenzieher.
- Prenda abaixo a abóbada com uma chave de fenda Phillips.
- Fissisi giù la cupola con un cacciavite "phillips".

18





**Wipe the dome clean.**

- Limpie la bóveda limpia.
- Essuyez le dôme.
- Wischen Sie die Haube sauber ab.
- Limpe a abóbada limpa.
- Asciughi la cupola.

## Replacement Parts List

**FDW8CF2  
FDP8CF2**

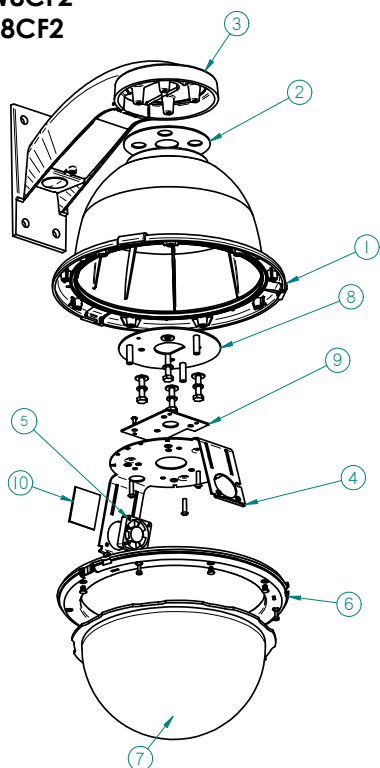

Item Number	Part Number	Comments
1	RPFD030	Plastic Housing Top
2	RP96GK2612	Housing Gasket
3	WM10	Wall Mount
4	RP302141	Camera Base Bracket
5	RPFD080	(12VDC) Blower (for 24VAC Housing)
6	RPFD100	Trim Ring Assembly for Dome
7	RCFD8	Clear Replacement Capsule
7B	RCTFD8	Tinted Replacement Capsule
8	RP30VL1744	Housing Clamping Bracket
9	SD0160	Connection PCB
10	SD0170	24 VAC Heater
11	RPNET02	Fixed Camera Bracket
12	RPPKH2094	Pendent Coupling Kit

# Product Registration/Warranty

Thank you for choosing Videolarm. We value your patronage and are solely committed to providing you with only the highest quality products available with unmatched customer service levels that are second-to-none in the security industry.

Should a problem arise, rest assure that Videolarm stands behind its products by offering some of the most impressive warranty plans available: **3 Years** on all Housings, Poles, Power Supplies, and Accessories and **5 Years** on all camera systems (SView, QView, Warriors), and InfraRed Illuminators.



## Register Your Products

Option 1: **Online**      Option 2: **Mail-In**

Take a few moments and validate your purchase with our **Online Product Registration Form** at **[www.videolarm.com/productregistration.jsp](http://www.videolarm.com/productregistration.jsp)** or complete and mail-in the bottom portion of this flyer.

Register your recent Videolarm purchases and benefit from the following:

- Simple and Trouble-Free RMA process
- Added into customer database to receive product updates / news
- Eliminate the need to archive original purchase documents: Receipts, Purchase Orders, etc...



Cut at the dotted Line

Place in envelope, affix stamp and mail to: Videolarm ATTN: Warranty  
2525 Park Central Ave.  
Decatur, GA 30035

## Main Contact Info

First Name: \_\_\_\_\_ Last Name: \_\_\_\_\_  
Professional Title: \_\_\_\_\_ Company: \_\_\_\_\_  
Address 1: \_\_\_\_\_ Address 2: \_\_\_\_\_  
City: \_\_\_\_\_ State / Province/Country: \_\_\_\_\_  
Zip / Postal Code: \_\_\_\_\_ Phone Number: \_\_\_\_\_ E-mail Address: \_\_\_\_\_

## Product Information

Please Circle One:      Business      Personal

Name & Location of Company / Store where Purchased: \_\_\_\_\_  
(City, State, Country)

Videolarm Product ID \_\_\_\_\_ Product Description \_\_\_\_\_

Serial # \_\_\_\_\_  
(Available only for Camera Systems, IR Illuminators, Wireless Devices)

PO# \_\_\_\_\_